


SD1 Safety Disconnect

- The SD1 Safety Disconnect provides extra fuel site protection by automatically disconnecting power from a pump or dispenser in the event of a leak. It can also be used to drive an external light or alarm to indicate the source of a problem. Install an SD1 in each dispenser and submersible pump for maximum safety and peace of mind.

FEATURES

- Automatically stops fueling in the event of liquid detection
- Mounts into dispenser or turbine pump sump
- Reset switch allows manual reset after problem is corrected
- All stainless steel float switch assembly
- Also available with dual output relays
- Mounts into existing junction box or light box. (3/4" conduit opening required)
- 1 normally closed and 1 normally open contacts. (30 amps per contact)
- Operates from 110VAC or 220VAC
- Intrinsically safe operation
(Complies with ANSI / UL 913, Class 1, Div. 1&2, Group C and D operation)
- 2 YEAR WARRANTY

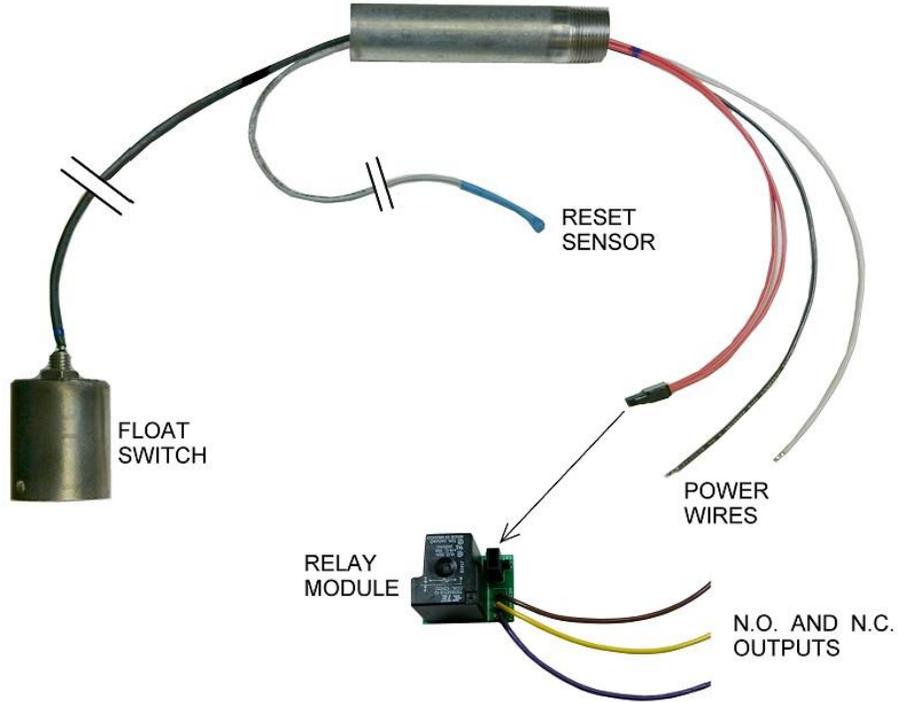

SPECIFICATIONS	
Operating Voltage:	90 VAC to 260 VAC
Operating Temperature Range:	-40 to 150 degrees F.
Current Draw:	< 0.25A @ 120 VAC
Relay Type	SPDT
Relay Current Rating	30 Amps @ 120VAC
Operating Voltage:	90 VAC to 260 VAC
Operating Temperature Range:	-40 to 150 degrees F.
Current Draw:	< 0.25A @ 120 VAC



Integrated Control Systems Inc.
 1425 American Way, Cedar Hill, TX. 75104
 PH: (972) 291-6064
 FAX: (972) 291-5975
WWW.INTCONSYS.COM

PART NUMBERS	
Model Number:	Description:
SD1-SP-B	Safety Disconnect, Single Pole Output
SD1-DP-B	Safety Disconnect, Double Pole Output

For more information, please visit our website at:

WWW.INTCONSYS.COM