


SS2 Surge Suppressor / Power Line Filter

- The SS2 surge suppressor / power line filter was designed to provide electrical surge protection and filtration right at a device's location. It incorporates 3 way surge protection with 1500 watts of power as well as a common mode noise filter. The small size allows it to be installed inside almost any junction box. Add the SS2 to each remote device in your installation to improve reliability and prevent failures.

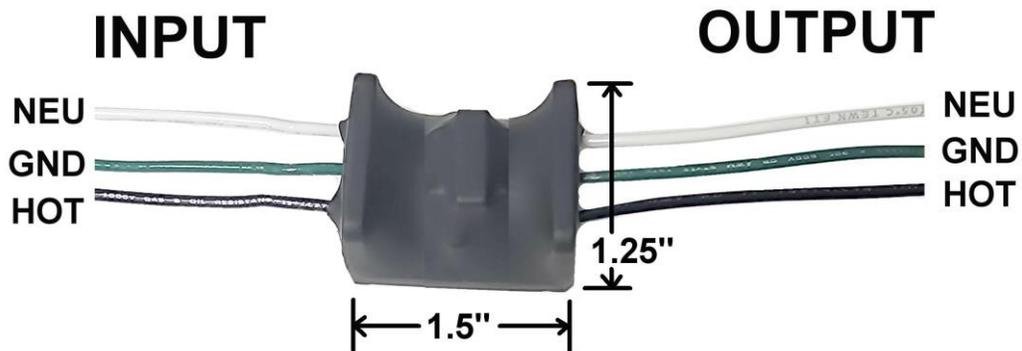

SPECIFICATIONS			
Voltage Rating:	120VAC Nominal, 135VAC Max.	Suppressor Type:	Series Connected, non fused
Max Load Current:	1 Amps Continuous	Capacitance	0.1 μ F input to earth ground
Max Discharge Current	1500W HOT to NEU 1500W HOT to GND 1500W NEU TO GND	Inductance	10mH Common Mode Input to Output
Case Size:	1.5 x 1.25 x 1.25 inches		

Integrated Control Systems Inc.
 1425 American Way, Cedar Hill, TX. 75104
 Voice: (972) 291-6064
 Fax: (972) 291-5975
WWW.INTCONSYS.COM

For more information, please visit our website at:

WWW.INTCONSYS.COM